



# ALIBI™

High Definition Surveillance



## 5000 SERIES 16-CHANNEL SWITCHBOX NVR

Powerful plug-and-play network video recorder supports up to 16 6.0 MP IP cameras

- + Plug-and-play support for compatible IP cameras
- + Supports up to 6.0 megapixel recording resolution
- + Integrated 16-port PoE network switch
- + Automatically detects and displays compatible cameras plugged into built-in PoE switch
- + Central Management Software (CMS) - Manage up to 256 devices across multiple locations from a single platform
- + 16 alarm inputs and 4 alarm outputs
- + VGA, CVBS and HDMI video outputs
- + Supports H.264 video streams to save hard drive storage space
- + Up to 16TB of internal video storage (4x 6TB hard drives maximum)
- + Multiple selectable recording modes (continuous, motion detection, schedule and event)
- + Recording features: event search, event log, and email event notification
- + Free iOS/Android app for remote viewing of live and recorded video
- + Linux embedded operating system
- + Features Alibi Power Tools, a collection of powerful utilities designed to streamline and simplify the installation, set-up, and management of your Alibi surveillance system.

ONVIF | S


IP



# ALIBI SWITCHBOX NVR

Alibi 5000 Series 16-Channel SwitchBox NVR

## CAPABILITIES

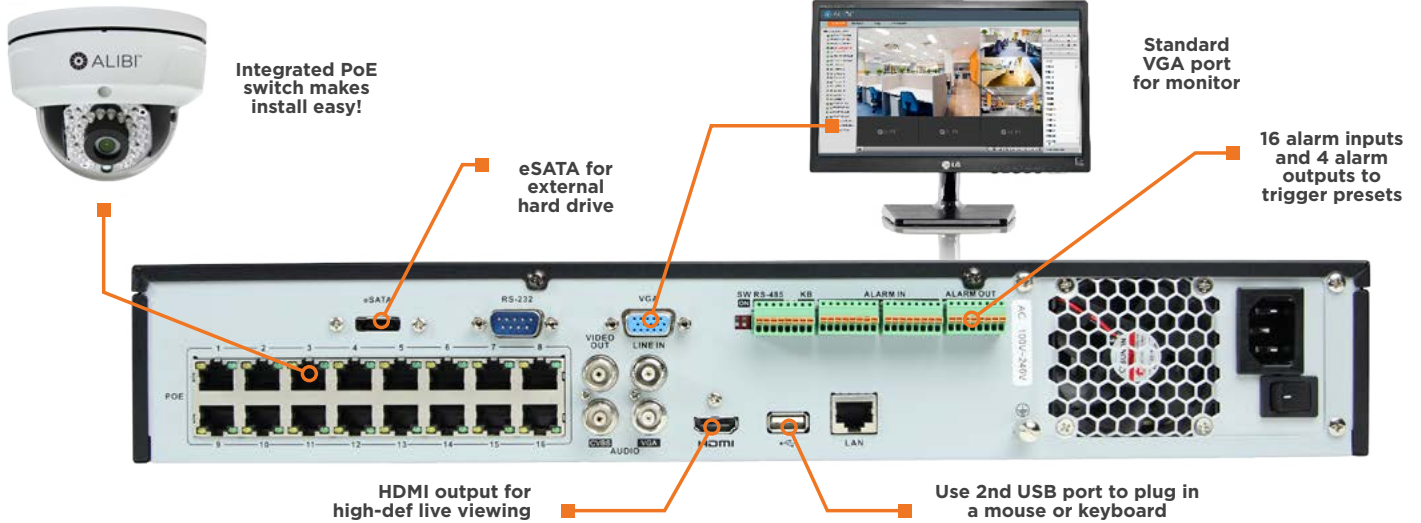

## ALIBI WITNESS MOBILE APP

Remotely monitor the live video via wireless network, play back recorded video, and more!



Live View



Remote Playback



# ALIBI SWITCHBOX NVR

Alibi 5000 Series 16-Channel SwitchBox NVR

## SPECIFICATIONS

Number of Channels Supported	16
Compression Format	H.264
Recording Performance	100 Mbps max
Remote Viewing Output Capacity	240 Mbps max
Recording Type	Continuous, Schedule, Alarm, Motion Detection
Supported IP Camera Resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Supported Playback Resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch, 4CIF / 8-ch, 720P / 4-ch, 1080P / 1-ch, 5MP
Video Output	VGA, HDMI, CVBS
Video Output Formats	1 channel (HDMI/VGA), resolution: 1920×1080P/60 Hz,1600×1200/60 Hz, 1280×1024/60 Hz, 1280×720/60 Hz, 1024×768/60 Hz 1 channel (CVBS), resolution: 704x480
Audio Input	1-ch, BNC (2.0 Vp-p, 1kΩ)
Audio Output	2-ch, BNC (Linear, 600Ω)
Export Formats	.MP4
Ethernet	1x Gigabit RJ-45 self-adaptive Ethernet interface, 16 independent 10 /100 Mbps PoE Ethernet interfaces (200 W max output)
USB	3x USB 2.0
Hard Drive Interface	4x SATA
Hard Drive Capacity	4x HDDs max., up to 4TB capacity per HDD
eSATA	1x eSATA interface
Serial Interface	1x RS-232; 1x RS-485
Alarm Input	16
Alarm Output	4
Operating System	Embedded Linux
Security	Password Protection
Protocols	IPv4, TCP/IP, UDP, HTTP, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, ONVIF, HTTP multipart
Power Requirements	100 - 240 Vac, 6.3 A, 50 - 60 Hz
Power Consumption	≤ 40W
Weight	8.8 lbs. (without HDD)
Dimensions (in.)	17.5" W × 15.3" D × 2.8" H
Operating Temperature	14°F - 131°F
Color / Material	Black
Material	Aluminum
Approvals	CE, FCC, RoHS

### REMOTE CLIENT SYSTEM REQUIREMENTS

Operating System	Microsoft Windows 2000, 2003, XP, Vista, 7, 8 (32-bit and 64-bit version) / Linux 2.6+ / Apple MacOS X 10.5 (Intel x86 only), 10.6 and 10.7
Web Browser	Microsoft Internet Explorer 8.0, 9.0, 10, and 11 (32-bit version), Mozilla Firefox 13 and higher and 3.6, Safari 5 and higher, Google Chrome
Software Requirements	Web Component Installation
Mobile Client OS Platform	iOS, Android (Alibi Witness)